



Printed in
Chicago, IL 60661 U.S.A.
© 2013 and 2020 Motorola Solutions, Inc. All Rights Reserved.

Motorola Solutions, Inc.
500 W Monroe Street

Mag One™ by Motorola Solutions is registered in the U.S. Patent and Trademark Office.
All other products and service names are the property of their own respective owners.
For a list of Motorola Solutions-approved antennas, batteries, and other accessories, visit the following web site which lists approved accessories: <http://www.motorola.com>.

The operations of your Motorola Solutions radio is subject to the Radiocommunications Act and must comply with rules and regulations of the Federal Government's department of Industry Canada. Industry Canada requires that all operators using Private Land Mobile Frequencies obtain a radio license before operating their equipment.

NOTICE TO USERS (INDUSTRY CANADA)

This device complies with Part 15 of the FCC rules per the following conditions:
• This device may not cause harmful interference including interference that may cause undesired operation.
• This device must accept any interference received, changes or modifications made to this device, not expressly approved by Motorola Solutions, could void the authority of the user to operate this equipment.

NOTICE TO USERS (FCC)

PRODUCT SAFETY AND RF EXPOSURE COMPLIANCE

ATTENTION!

Before using this product, read the operating instructions for safe usage contained in the Product Safety and RF Exposure booklet enclosed with your radio.

Caution


RF energy exposure
This radio is restricted to occupational use only to satisfy FCC requirements. Before using this product, read the RF energy awareness information and operating instructions in the Product Safety and RF Exposure booklet enclosed with your radio (Motorola Solutions Publication part number 6881095C98) to ensure compliance with RF energy exposure limits.

Attaching and Removing the Antenna

Attaching and Removing the Battery

Attaching and Removing the Belt Clip

Charging your Radio

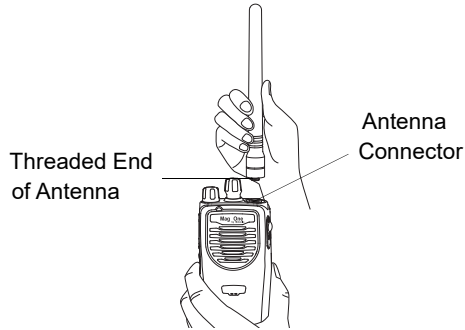

To Attach Antenna

1. Fasten the antenna to the radio by placing the threaded end of the antenna into the Antenna Connector.
2. Rotate the antenna clockwise until tight.

To Remove Antenna

1. Turn the antenna in a counter-clockwise direction until it disengages from the radio.



To Attach Battery

1. Align and fit the battery tongue into the groove of the chassis of the radio.
2. Secure the latch at the bottom of the radio.

To Remove Battery

1. Unlatch the battery clasp at the bottom of the radio.
2. Gently lift the hilt of the battery nearest to the battery latch away from the housing.
3. Slide battery downwards to remove.




To Attach Belt Clip

1. Align mounting rails of the radio with the grooves of the belt clip.
2. Slide the belt clip downwards until it clicks into place.

To Remove Belt Clip

1. Lift the release tab.
2. Slide the belt clip upwards.



1. Turn off your radio and the A/C power supply to your charger if they are on.
2. Place your radio in the charger pocket.
3. Turn on the charger A/C power supply.
4. While charging your radio, the charger LED shows a steady red light. The radio should be charged at least 16 hours initially before decreasing charging time to 12 hours.
5. Turn off the charger A/C power supply, and remove the radio from the charger pocket.
6. For more details, refer to your Tri-Chem Charger User Guide (6871916T01).

